



UniFi UISP Branding

Search UniFi products

Switching

WiFi

Camera Security

Door Access

Integrations

Advanced Hosting

Bullet > G6 Pro Bullet



G6 Pro Bullet

UVC-G6-Pro-Bullet



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

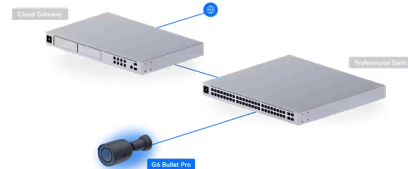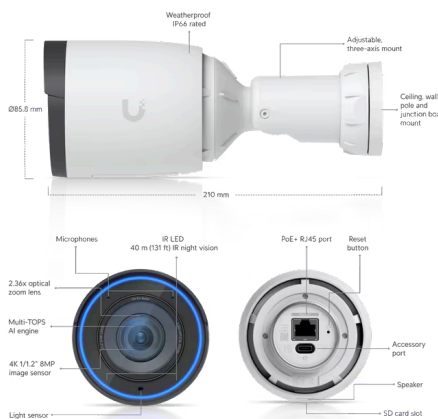

Overview

Dimensions

Without mount: 85.8 x 106.2 mm (3.4 x 4.2")
With wall mount: 85.8 x 210 mm (3.4 x 8.3")

IR Night Vision

40 m (131 ft)
Up to 60 m (197 ft) with Vision Enhancer

Zoom Mode

2.36x Optical

Face Recognition

✓

License Plate Recognition

✓


Smart Detections (People, Vehicles, Animals)

✓

Resolution	4K
Field of View	Wide: H: 113.8°, V: 61.9°, D: 134° Tele: H: 45.5°, V: 25.8°, D: 52°
Audio	Two-way audio
Weatherproofing	IP66
Tamper Resistance	IK04
Mounting	Wall, Ceiling, Pole mount (Included) Junction Box, Angled Base (Optional)
^ Performance	
Networking Interface	GbE RJ45 port
Video	
Image Settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay, HDR
Max. Frame Rate	30 FPS
Resolution	8MP 3840 x 2160 (16:9)
Optics	
Sensor	1/1.2" 8MP
Lens	F 5.9-13.8 mm; f/1.5-f/2.9
Night Mode	Built-in adaptive IR LED illumination and IR cut filter
^ Hardware	
Max. Power Consumption	15W
Supported Voltage Range	37-57V DC
Power Method	PoE+
Processor	Quad core Arm® Cortex®-A53 based chip
Pole Mount Diameter	1.5-2" (38-50 mm) ⓘ
Weight	Without mount: 755 g (1.7 lb) With mount: 980 g (2.2 lb)
Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Wall mount: aluminum alloy, polycarbonate Pole mount: aluminum alloy
Expansion Slot	MicroSD card

Button	(1) Factory reset
Ambient Operating Temperature	-20 to 50° C (-4 to 122° F)
Ambient Operating Humidity	0 to 90% noncondensing
NDA Compliant	✓
Certifications	CE, FCC, IC

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.