



[UniFi](#) [UISP](#) [Branding](#)

Q Search UniFi products

[Switching](#)

[WiFi](#)

[Camera Security](#)

[Door Access](#)

[Integrations](#)

[Advanced Hosting](#)

Bridging > [Device Bridge Switch](#)




# Device Bridge Switch


## UDB-Switch

[Datasheet](#)

- [In The Box](#)
- [Marketing Images](#)
- [Accessories](#)
- [Installation Guide](#)

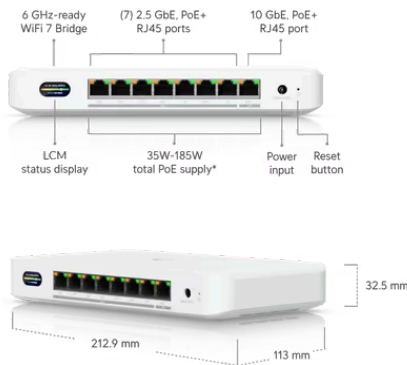

\*35W of PoE power with the included 60W adapter, or up to 185W with the optional 210W adapter.

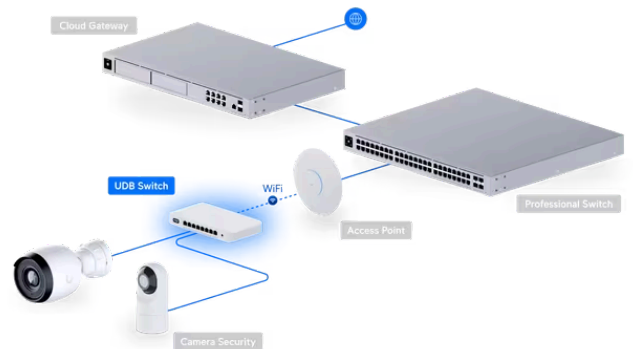

### ^ Overview

Dimensions	212.9 x 113 x 32.5 mm (8.4 x 4.4 x 1.3")
WiFi Standard	WiFi 7
Spatial Streams	4
Mounting Locations	Desktop, wall
Power Method	DC jack (54V DC/1.1A)
Power Supply	54V DC/1.1A (Adapter included)

### ^ Performance

## MIMO

6 GHz 2 x 2

5 GHz 2 x 2

## Max. Data Rate

6 GHz 5.8 Gbps (BW320)

5 GHz 4.3 Gbps (BW240)

## Antenna Gain

6 GHz 8 dBi

5 GHz 8 dBi

## Max. TX Power

6 GHz 23 dBm

5 GHz 26 dBm

## Max. Conducted TX Power

26 dBm (Combined)

## Supported Data Rates

802.11be (WiFi 7) 6 GHz: 7.3 Mbps to 5.8 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/320)  
5 GHz: 7.3 Mbps to 4.3 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/240)

802.11ax (WiFi 6) 7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)

802.11ac (WiFi 5) 6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)

802.11n 6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)

802.11a 6, 9, 12, 18, 24, 36, 48, 54 Mbps

## Wireless Security

WPA3 SAE (Always On)

^ **Hardware**

Max. Power Consumption 25W (Excluding PoE output)

Supported Voltage Range 42.5-57V DC

Networking Interface (1) 10 GbE RJ45 port  
(7) 2.5 GbE RJ45 ports

PoE Interface (8) PoE+ ports

Max. PoE Wattage per Port	30W
Total PoE Availability	60W AC adapter input: 35W 210W AC adapter input: 185W
Antennas	(1) Internal
Management	Ethernet WiFi
Channel Bandwidth	20/40/80/160/240/320 MHz
Weight	Device: 548 g (1.21 lb) With mount: 563 g (1.24 lb)
Enclosure Material	Polycarbonate
Mount Material	Polycarbonate
LCM Display	0.96" status display
Button	(1) Factory reset
NDAA Compliant	✓
Certifications	CE, FCC, IC
Operating Frequency	Worldwide: 5150—5875 MHz 5945—7125 MHz
Ambient Operating Temperature	-30 to 40° C (-22 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing

^ **Software**

Application Requirements

UniFi Network Version 10.0.156 or later.

**Stay in Touch**

Email 

